



SV-A110

sistemas para puertas correderas

Poligono Industrial Foradada - 08580 - Sant Quirze de Besora (Barcelona)

Telf. 34-93.852.92.23

Export. Telf. 34-93.852.96.15


e-mail: saheco@saheco.com - web: www.saheco.com

MADE IN E.U.

**GRUPO
TORREMAT**





FEB. 2023
038060825




CODE: 0 110 00


a		2	d		1	g	 M10 x 45	2
b		2	e	 DIN 7505 A 4x20	2	h		2
c		2	f		1	i		2

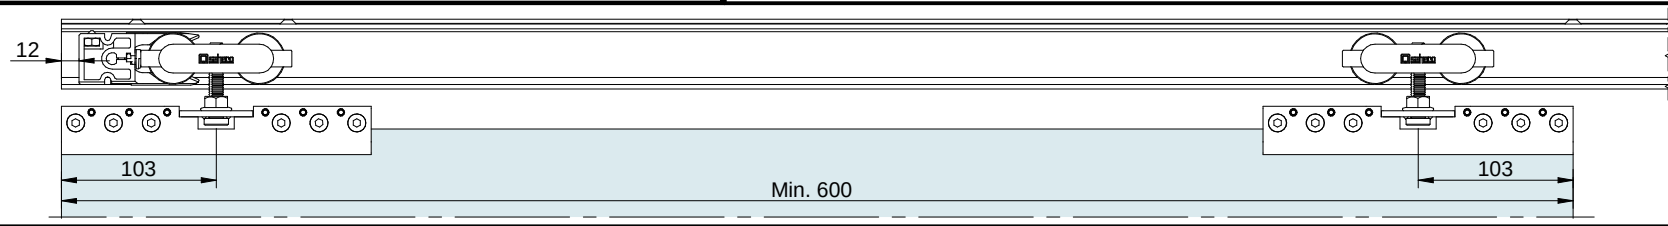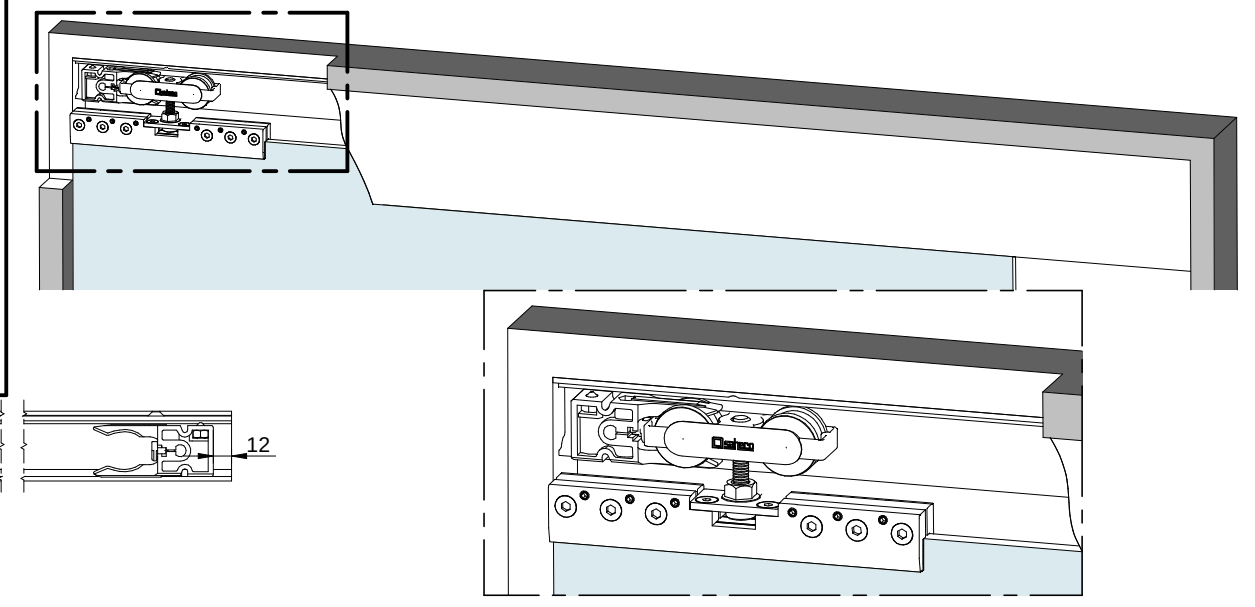


PERFIL STANDARD XL / Track Standard XL

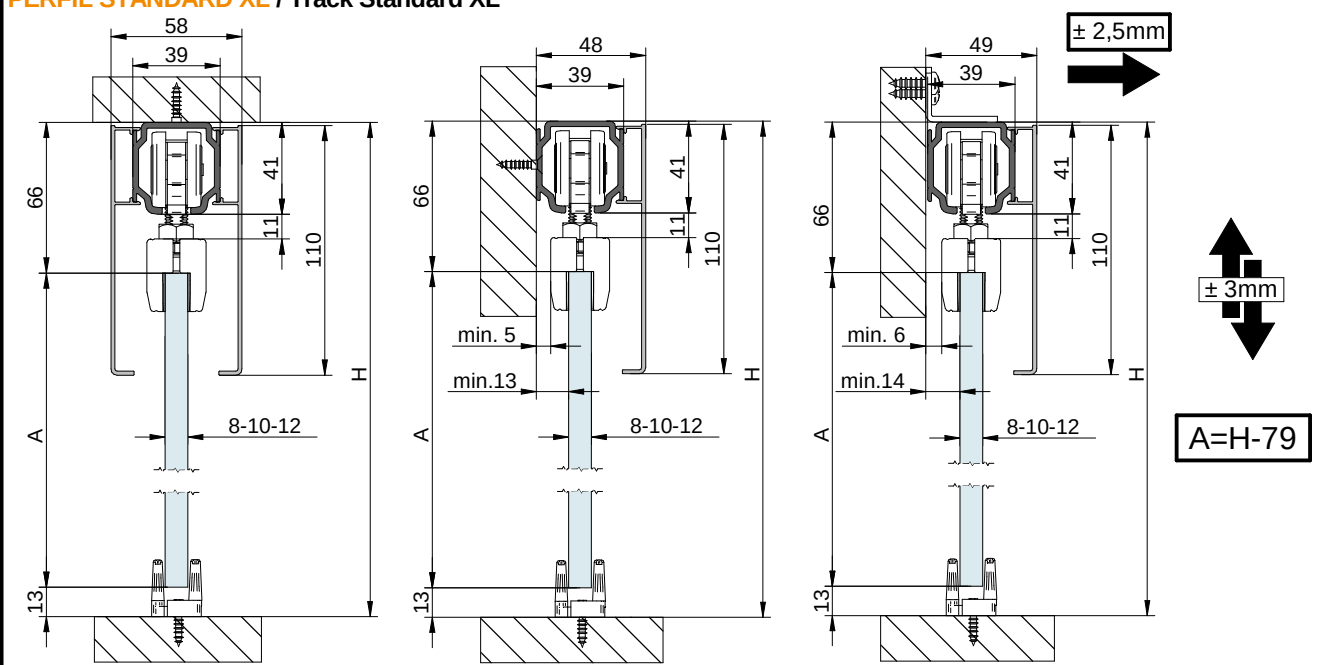


PERFIL EXCELLENCE XL / Track Excellence XL

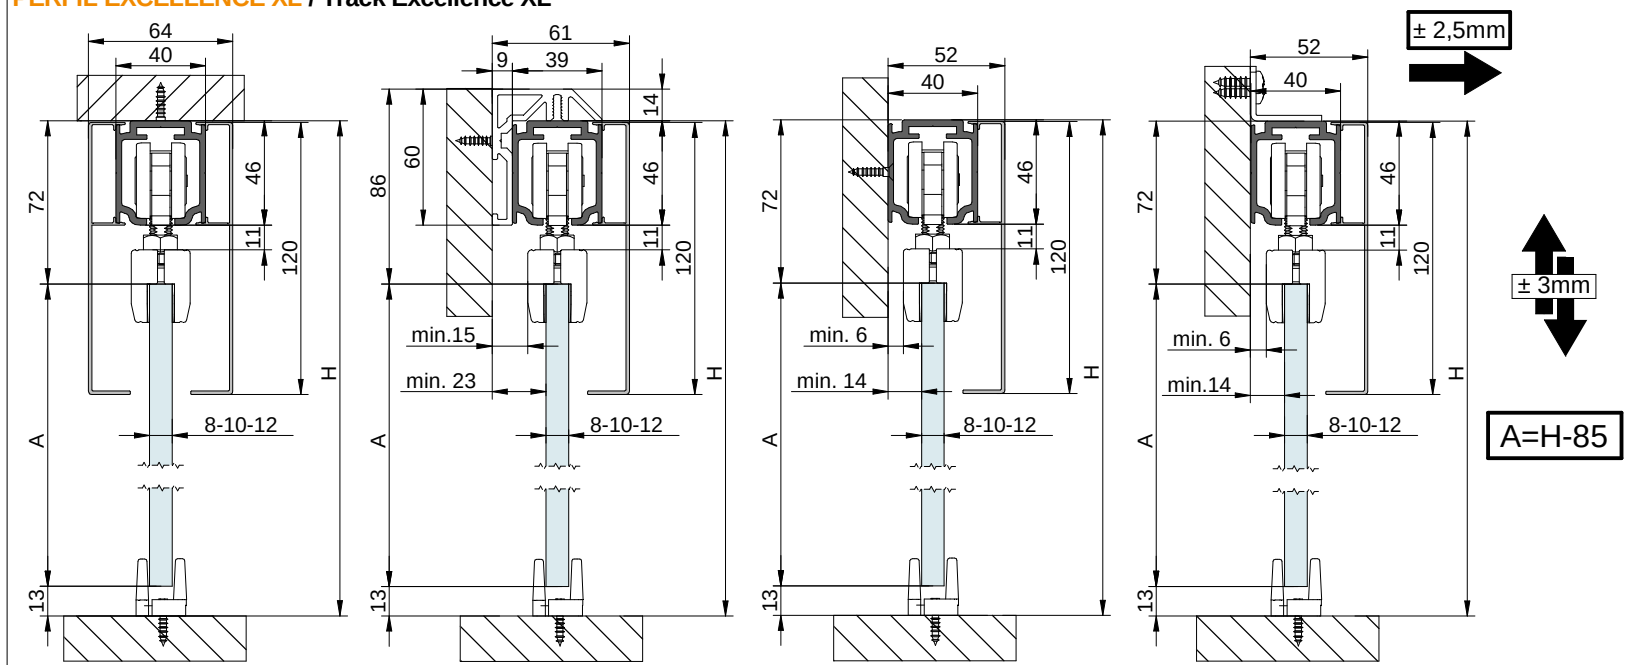


PERFIL STAR XL / Track Star XL

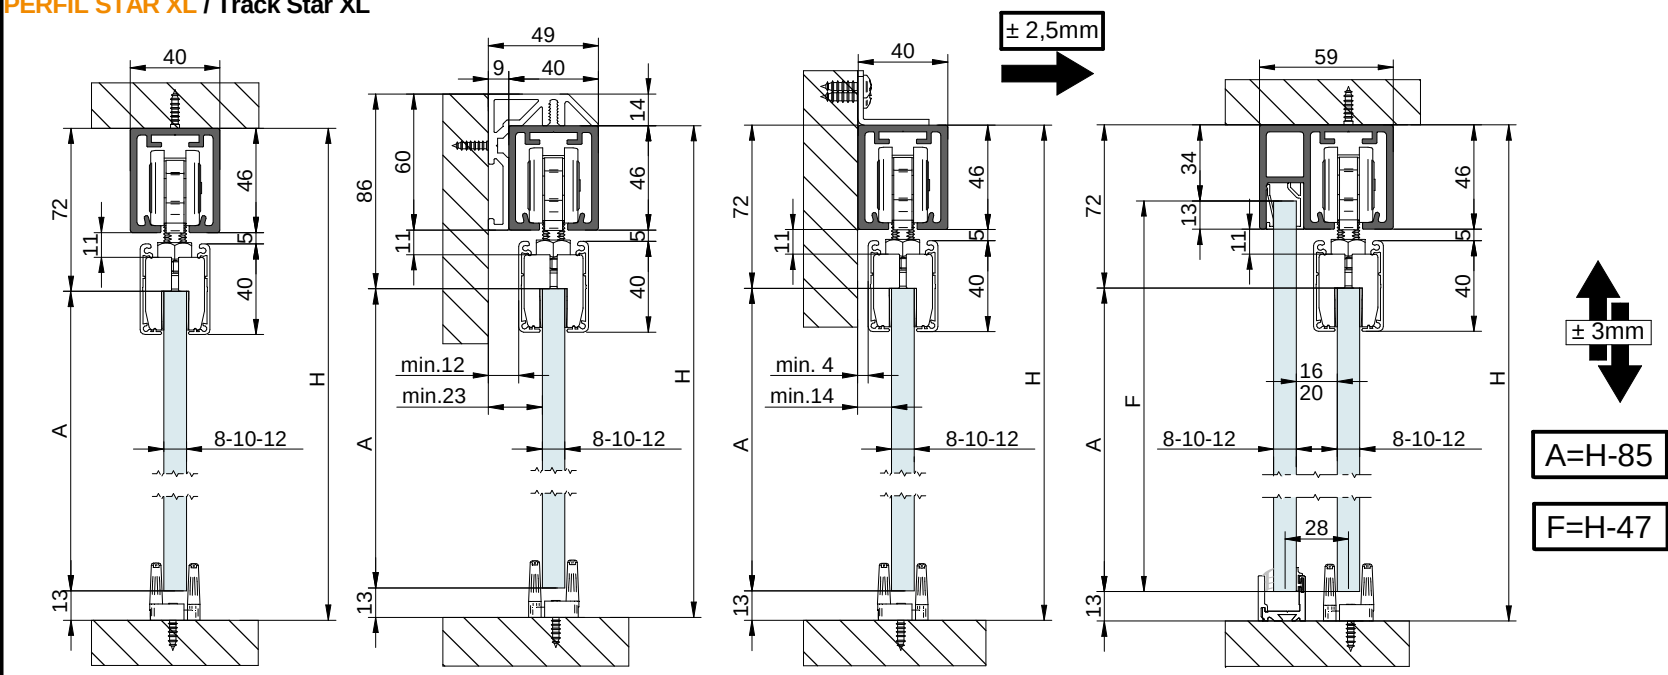


PERFIL STAR FALSO TECHO XL / Track Star for plasterboard XL

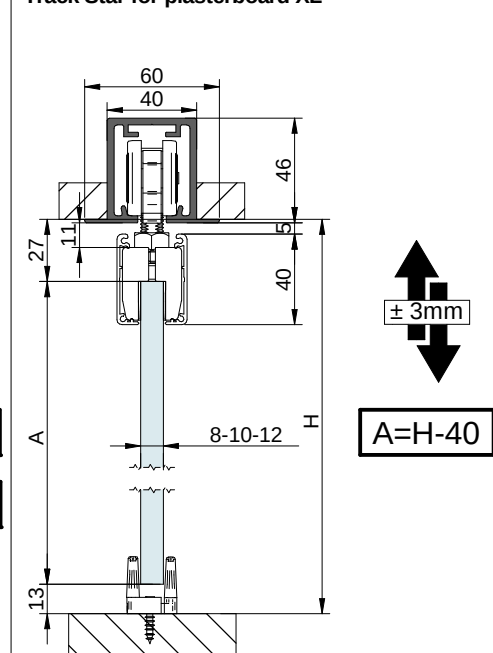

MONTAJE PERFIL FUNDA XL / AssemblySupport FT XL track

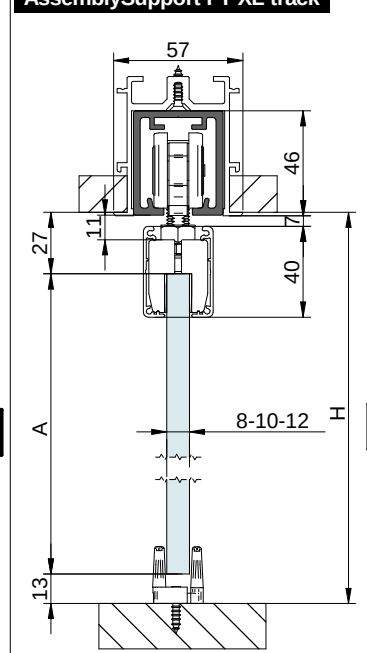

PERFIL STAR FTI FALSO TECHO / Track Star FTI for plasterboard

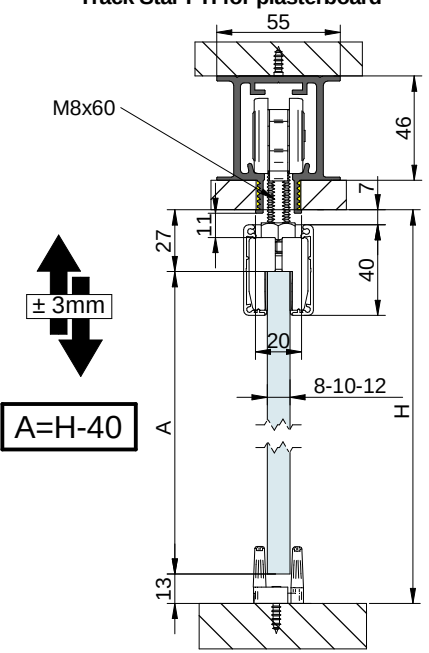

STANDARD

Ø 5,5

10,5

EXCELLENCE

STAR

100

400

DIN 7505

100 200

DIN 7505 A 5x50

A detailed diagram of a cable-stayed bridge model. The bridge deck is supported by two main piers. A cable is shown attached to the deck, with a force measurement point labeled 13 N/m . The diagram includes various components like the deck, piers, and cables, with labels for different parts.

REF.: 00 40 57

The diagram illustrates the assembly steps for the window frame:

- Step 1:** The window frame is shown being inserted into the mounting bracket.
- Step 2:** The window frame is shown being secured by the mounting bracket.
- Step 3:** The window frame is shown being secured by the mounting bracket.
- Step 4:** The window frame is shown being secured by the mounting bracket.
- Step 5:** The window frame is shown being secured by the mounting bracket.

LARGO /	Nº TALADROS /
2m	6 (Ø 5,5mm)
3m	9 (Ø 5,5mm)
4m	11 (Ø 5,5mm)
6m	16 (Ø 5,5mm)

DIN 7505 A 5